



HIGH-SPEED  
DOORS

# MAVIMAX®



## The XXL folding high-speed door

- MAVIMAX® is the oversized door that allows important accesses to be closed while maintaining the advantages of a high-speed door.
- Unique design, MAVIMAX® adapts to the specificities of each specification.
- The frames and the curtain equipped with a PVC flap on the bottom part ensure floor tightness for maximum insulation.
- The patented system of flexible guides stretched in the frames dampens the stiffeners of the curtain and reduces wind noise nuisance.

### A door according to your needs:



FOLD-UP  
DOOR



XXL



WIND  
CLASS 4



CELLS  
x4  
DETECTION



SAFETY STRAPS



TAILOR  
MADE

### An ideal door for:



INDUSTRY



LOGISTIC  
PLATFORM

## Clear opening dimensions

- Maximum - Standard version 60m<sup>2</sup>

## Frame

- Steel with epoxy polyester powder coating
- Flexible guides integrated in the frames

## Curtain

- Fire resistance D
- 100% polyester weft, PVC coated and prestressed
- Anti-UV and anti-mould treatment
- SECURISANGLE® curtain fall protection system

## Options

- Row(s) of oblong(s)
- Triple insulated curtain with thermal insulation UF 2.6
- Fire resistance C

## Functioning

- Opening and closing speed: 0.5m/s
- Opening height: 2 levels, for pedestrians and for vehicles/ machinery

## "A la carte" security

- System 4 photocells

## Motorization

- Single-speed motor
- 2 geared motors with hollow shaft
- Power: 2.2kW or 3kW
- Stainless steel brake IP 55 anti-corrosion
- Mounting on silentblocks: flexible coupling
- Transmission shaft mounted on self-aligning ball bearing

## Control box

- IP65 remote ABS control box, for wet areas
- MAVIFLEX electronic card with LCD display and control LEDs
- Cycle counter

## Opening controls

- **Manual:** remote control, pull switch, push button...
- **Automatic:** magnetic loop, cells, radar...

## Electrical supply




Other electrical supply on demand.

# Technical dimensions

## Control box

- Control box power cable: 4G2.5 square 3 phases + ground without neutral
- Electrical supply: 400V 3-phases + ground
- Head circuit breaker: 20A curve C or 16A curve AM
- Dimensions: (h) 500 x (w) 400+52 x (d) 200 mm

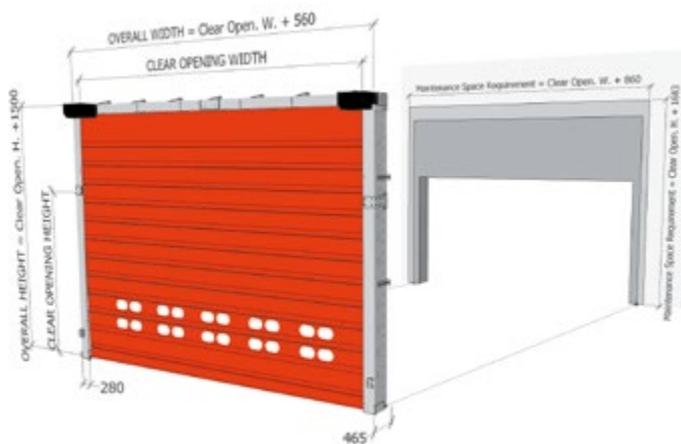

Dimensions and specifications are subject to change without notice.

# Curtain options



Oblong windows



# Colours

Standard RAL for frame and curtain (Fire resistance D)



Other colours on demand.

Subject to supplier stocks. RAL colours may vary.