


Characteristics

The energy loss caused by loading and unloading in air-conditioned transports has very high costs for carriers. Therefore, the Airtrack air curtain has been specially designed to avoid these losses, achieving fuel savings of up to 30%.

The compact size, the three-step fixing system and the adaptable length from 850 mm to 2430 mm make it easy to install on any type of vehicle, from vans to trailers. In addition, a perforated grille facilitates basic maintenance of the air curtain.

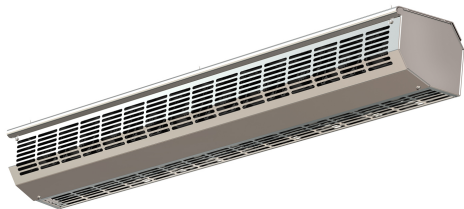

- Compact air curtain specially designed for vehicles that carry air conditioned loads.
- Savings up to 30% in fuel consumption.
- Self-supporting aluminium frame.
- Includes bracket with quick-fixing system for ceiling installation.
- Perforated inlet grille to avoid intensive maintenance service.
- Compact low voltage 24V DC fans designed to operate between -25 °C and 50 °C.
- Customised curtain length from 850 mm to 2,430 mm to suit any type of transport vehicle: vans, trucks, trailers, vehicles with roll-up doors, etc.

Specifications

50Hz

Model	Air Flow (m³/h)	Unheated		Weight (kg)
		Power fans (kW)	Fan Consumption (A)	
AIRTRACK 2430	2000	0,190	0,27	14
AIRTRACK 1000	830	0,072	0,27	5,8

Dimensions

